


LATCH FITTING INSTRUCTIONS

MAGNA•LATCH® 'Side Pull' Model


Installing this MAGNA•LATCH gate latch is quick and easy. The installer requires an electric or cordless drill, screwdriver, measuring tape and pencil. Obtain four stainless steel countersunk screws or bolts suitable for fixing the latch to your gate material (steel, aluminium, wood etc.).

Important: This latch is designed for use on gates where the opening between the gate and the latch post is no greater than 10mm ($\frac{3}{8}$ "), ideally 5 to 8mm ($\frac{3}{16}$ – $\frac{5}{16}$ "). Install a 'gate stop' (striker plate) if required.

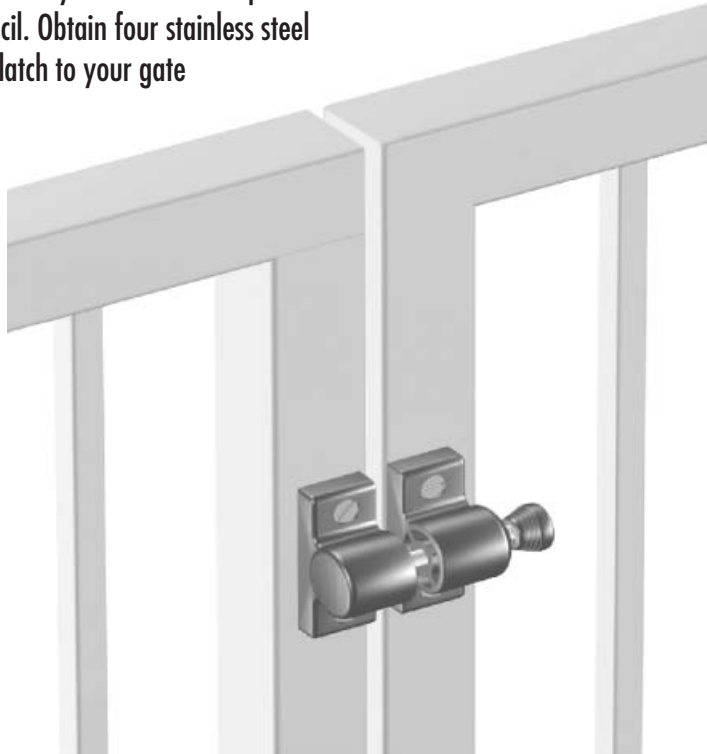

INSTALLATION PROCEDURE

1. Determine the appropriate height/position of the latch on the gate. Draw a level line across the gate and latch post to indicate the height.
2. Align Part A on the latch post so that it is 'flush' with the vertical edge of the post (see diagram). Insert a pencil into the countersunk holes and mark 'dots' on the latch post [C].
3. Remove Part A and drill pilot holes.
4. Take the screwdriver and two of the screws and secure Part A to the latch post.
5. Perform the same procedure for Part B on the gate [D] as per diagram. Note that the magnet within Part A will cause the latch bolt in Part B to "snap" into the latching slot. Use this to advantage by positioning Part B so that it is in line and level with Part A.
6. Mark the two holes, drill and secure Part B to the gate. Your MAGNA•LATCH is ready for use!

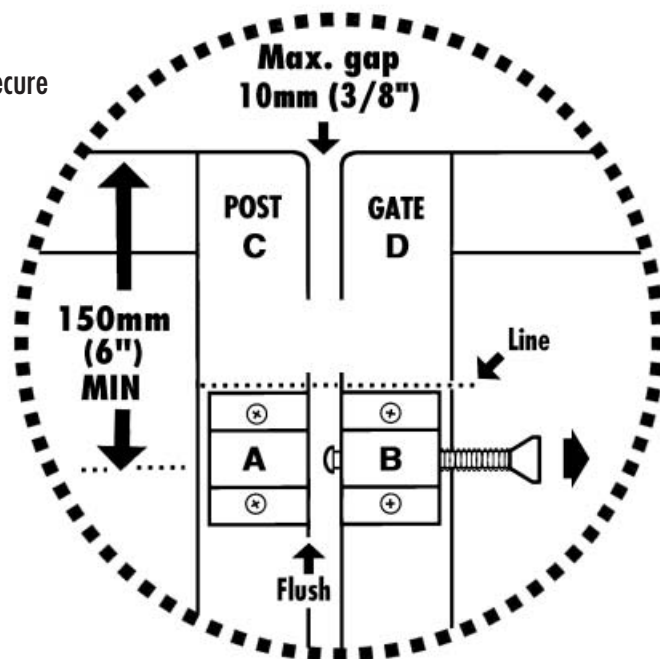

Made in  Australia

d&d technologies

AUSTRALIA: 192 Harbord Rd, Brookvale NSW 2100
USA: 7731 Woodwind Drive, Huntington Beach, CA 92647

Swimming pool fences, gates and latches cannot substitute for adult supervision. If using this latch on a swimming pool gate, consult all appropriate local authorities for safety requirements. The latch will operate properly only if installed and maintained in accordance with these instructions.

MAINTENANCE: REMOVE KEY FROM LOCK AFTER USE. Regularly lubricate the key-lock part of this latch by spraying oil-based lubricant into lock. Do not lubricate any other part of the latch. Ensure all screws or bolts are tightened firmly and that the release knob [F] and latching bolt are kept free of sand, debris or ice which could impair the latch's performance.

WARRANTY & LIMITATION OF LIABILITY

The products are warranted to be free of defects in materials and workmanship to the original purchaser for as long as he/she owns the product. If a defect appears, the original purchaser may return the item, freight prepaid, together with proof of purchase to the company or its approved international agents. The company or agent will, at its discretion, repair or replace the defective item or part without charge to the purchaser. THIS WARRANTY SHALL NOT APPLY WHEN the product has been tampered with, when repairs or attempted repairs have been made by unauthorised persons, where the item has been subjected to misuse, abuse, accident or damage in transit, or where the installer has not followed the instructions set out during installation or operations. IN NO EVENT SHALL THE COMPANY BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES. No warranty is given other than that set out above. No other express or implied warranties (including statutory warranties) apply, other than warranties which may not be legally excluded.